


12-fiber Distribution Cable

Profile View

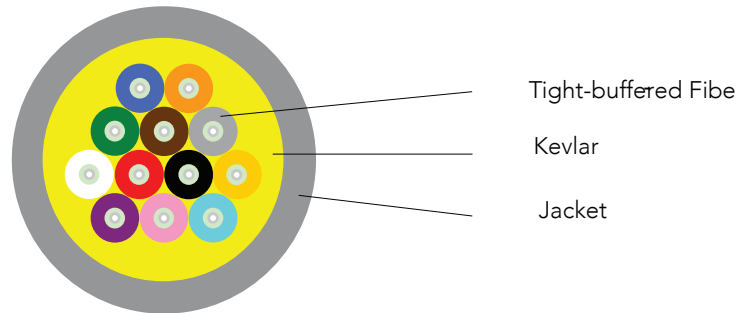

Cable Parameters

Items		Specifications
Fiber Type		50/125 OM3
Fiber Count		12
Tight-buffered Fiber	Dimension	900±50µm
	Material	LSZH
	Color	Blue, orange, green, brown, gray, white, red, black, yellow, violet, pink, aqua
Strength Member		Kevlar
Jacket	Dimension	6.3±0.2mm
	Material	LSZH
	Color	Black

Mechanical and Environmental Characteristics

Items	Unite	Specifications
Tension (Long Term)	N	200
Tension (ShortTerm)	N	660
Crush (Long Term)	N/10cm	300
Crush (Short Term)	N/10cm	1000
	mm	20D
Min. Bend Radius (Static)	mm	10D
Storage temperature	°C	-20~+60
Installation temperature	°C	-10~+50
Operation temperature	°C	-20~+60